




Product Data

58MSA 4-Way Multipoise Fixed-Capacity Condensing Gas Furnace

Input Capacities: 40,000 thru 120,000 Btuh

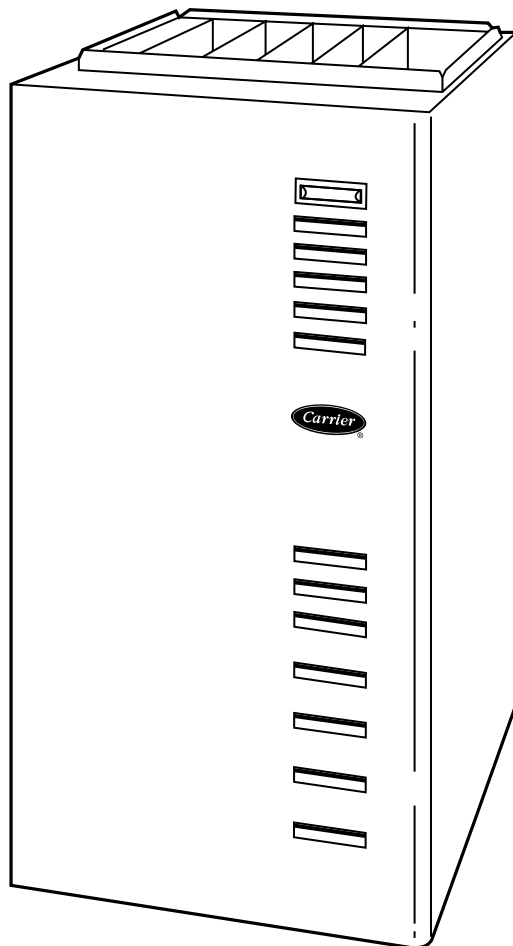

High Efficiency and Flexibility Designed to Meet the Needs of New Homes

The model 58MSA combines high efficiency with flexibility to meet the changing needs of new home construction. The unique 4-way, multipoise design of the 58MSA allows for installation in upflow, downflow, horizontal left, and horizontal right orientations, meaning it is perfect for a variety of installation applications. The furnace is factory configured for upflow application but can easily be made ready for downflow or horizontal installation.

Horizontal applications offer the advantage of reduced space requirements by locating the furnace in an attic or crawlspace, freeing space formerly dedicated to a furnace or utility room.

The 58MSA is specifically designed to meet the needs of home builders and new home owners. Home builders benefit from the 58MSA's unmatched flexibility and by building a reputation of using quality appliances in homes. Home owners benefit by energy savings from one of the most important home appliances.

The components of the 58MSA represent the finest in the industry. Hot surface ignition (HSI) and an integrated control center provide reliable and efficient ignition. The inducer and inducer motor are unique in that efficient operation is achieved in any type of installation. Standard PVC pipe is used to provide combustion air to the furnace and

vent the exhaust outdoors. The primary and secondary heat exchangers are backed by a 20-year Limited Warranty.

The 58MSA is a standard part of a quality-built new home. This high-efficiency furnace will provide years of quality service to home builders and home owners alike.

As with other Carrier furnaces, this model is designed to work as a part of the total home comfort system which includes elements for cooling, air cleaning, humidification, ventilation, and zoning.

58MSA FEATURES/ BENEFITS

Casing — One piece, seamless wrap-around construction of heavy, pre-painted galvanized steel resists corrosion.

Certifications — The 58MSA units CSA (A.G.A. and C.G.A.) design certified for use with natural and propane gases. The furnace is factory-shipped for use with natural gas. A CSA (A.G.A./C.G.A.) certified gas

conversion kit is required to convert furnace for use with propane gas. The efficiency is GAMA efficiency rating certified. The 58MSA meets California Air Quality Management District emission requirements.

Warranties — 20-year Limited Warranty on the heat exchangers. Five-year Limited Warranty on entire unit. Contact your dealer for details.

Combustion Air and Venting — This furnace uses combustion air from an area adjacent to the furnace and brings it in through a short section of inlet pipe that terminates just outside of the cabinet. The vent pipe can terminate through a sidewall or through the roof.

Blower Access Panel Switch — Shuts off all 115-v power through furnace components whenever blower access panel is opened.

Hot Surface Igniter — No pilot flame to waste gas or cause ignition problems.

Slow Opening Redundant Gas Valve — The slow opening feature reduces start-up noise from rapid ignition.

Insulation — Foil-faced insulation in heat exchanger section of the casing minimizes heat loss.

Integrated Control Center — Controls sequencing and furnace operation. Equipped with a component test feature and status indicator light to assist in troubleshooting. Control times blower start after main burners ignite to eliminate cold air blowing into rooms.

Adjustable Blower Speed — For precise airflow selection of heating or cooling operation.

Monoport Burners — The burners are finely tuned for smooth, quiet combustion plus economical gas usage.

Serpentuff™ — Exclusive Serpentuff coating, a patented polypropylene laminate is used on the secondary heat exchanger.

Quality Registration — The 58MSA is engineered and manufactured under an ISO 9001 registered quality system.

Carrier accessories*


UNIT SIZE	040-08 040-12	060-08 060-12 060-16	080-12 080-16 080-20	100-16 100-20	120-20
GAS CONVERSION KIT—NATURAL-TO-PROPANE	KGANP2901ALL				
GAS CONVERSION KIT—PROPANE-TO-NATURAL	KGAPN2301ALL				
TWINNING KIT†	N/A	KGATW0601HSI			
DOWNFLOW BASE (For Combustible Floors)‡	KGASB0201ALL				
CONDENSATE NEUTRALIZER KIT (obtained thru RCD)	P908-0001				
CONDENSATE FREEZE PROTECTION KIT	KGAHT0101CFP				
SIDE FILTER RACK (Without Filter) Upflow Only	KGAFR0206ALL				
ELECTRONIC AIR CLEANER (EAC)	Model EACA				
MECHANICAL AIR CLEANER	Model FILCAB, EZXCAB				
HUMIDIFIER	Model HUM				
HEAT RECOVERY VENTILATOR	Model HRV				
ENERGY RECOVERY VENTILATOR	Model ERV				
UV LIGHTS	Model UVL				
VENT/EXHAUST PIPE EXTERNAL TRAP KIT	KGAET0106ETK				

* Factory-authorized and field-installed. Gas conversion kits are CSA (A.G.A./C.G.A.) recognized.

† For 16 and 20 sizes only. See kit Installation Instructions for details.

‡ Required for installation on combustible floors when no coil box is used, or when any coil box other than a Carrier cased coil is used.

N/A — Not Applicable




A97432

CONTROLS: THERMOSTATS AND ZONING

Available in programmable and non-programmable models, Carrier thermostats maintain a constant, comfortable temperature level in the home.

For the ultimate in home comfort, Carrier's 2, 4, and 8-zone systems allow temperature control of individual "zones" of the home. This is accomplished through a series of electronic dampers and remote room sensors. The 4-zone system is shown.




A93068

SIDE FILTER RACK

Custom-made filter rack for easy connection when a return plenum already exists. Provides easy access for cleaning filter. Accepts one 16 x 25 x 1 in. filter.


A	23-1/8 in.
B	2-3/8 in.
C	14-1/2 in.



A97152

ELECTRONIC AIR CLEANER



Cleans the air of smoke, dirt, and many pollens commonly found. Saves on decorating and cleaning expenses.



A01484


MODEL HUM HUMIDIFIER

By adding moisture to winter-dry air, a Carrier humidifier can often improve comfort and keep furniture, rugs, and draperies in better condition. Moisturizing household air also helps to retain normal body heat and provides comfort at lower temperatures.




A92505

HEAT EXCHANGERS

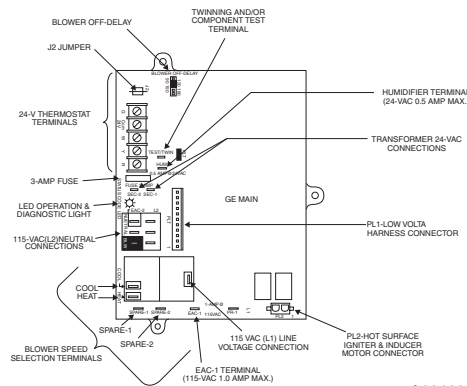

A02100


CONTROL CENTER

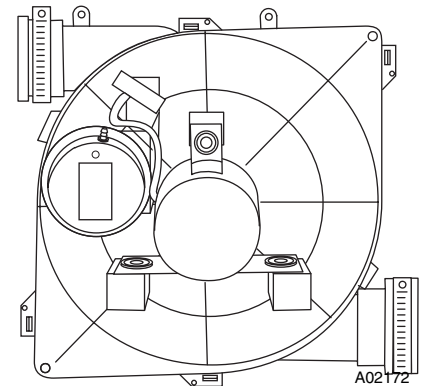


A02172

INDUCER ASSEMBLY

Model number nomenclature

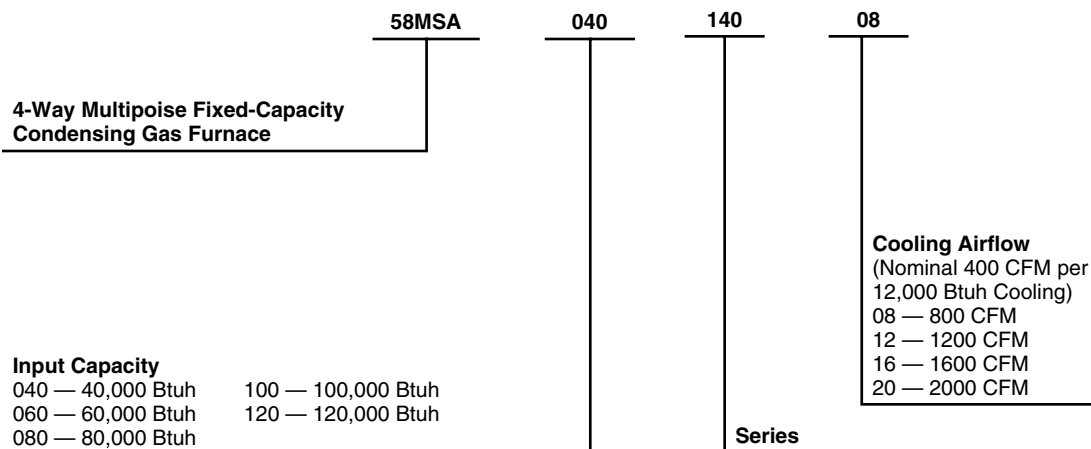

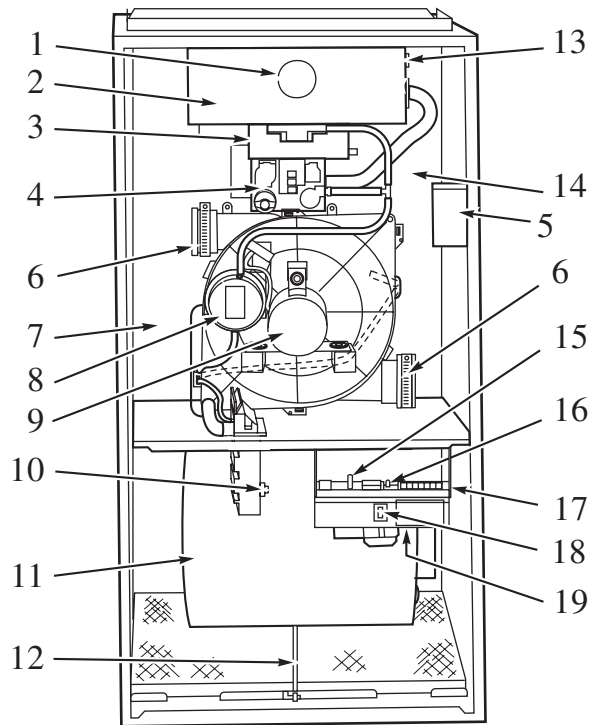

A02173

NOTES:

1. The 58MSA Furnaces are for use with natural gas, but can be field-converted for propane gas with a factory-authorized and listed accessory conversion kit.
2. Component location and configuration may be different than shown above.

- | | |
|--|---|
| <p>1 Burner sight glass for viewing burner flame.</p> <p>2 Burner assembly (inside), operates with energy-saving, inshot burners and hot surface ignitor for safe, dependable heating.</p> <p>3 Combustion-air intake connection (right or left side).</p> <p>4 Redundant gas valve. Safe, efficient, gas control.</p> <p>5 Junction box for 115-v electrical power supply. (right or left)</p> <p>6 Vent outlet, uses PVC pipe to carry vent gases from the furnace's combustion system (right or left side).</p> <p>7 Secondary condensing heat exchanger (inside), wrings out more heat by condensing water out of burned gas. Constructed with polypropylene-laminated steel to ensure durability.</p> <p>8 Pressure switch ensures adequate flow of flue products through furnace and out vent system.</p> <p>9 Inducer motor, pulls hot flue gases through the heat exchangers, maintaining negative pressure for added safety.</p> | <p>10 Condensate drain connection, collects moisture condensed during the combustion process.</p> <p>11 Heavy-duty blower, circulates air across the heat exchangers to transfer heat into the home.</p> <p>12 Air filter and retainer, may be used for side return application.</p> <p>13 Rollout switch (manual reset) to prevent overtemperature.</p> <p>14 Primary serpentine heat exchanger (inside), stretches fuel dollars with the S-shaped heat-flow design. Solid construction of corrosion-resistant aluminized steel means reliability.</p> <p>15 3-amp fuse provides electrical and component protection.</p> <p>16 Light emitting diode (LED) on control center. Code lights are for diagnosing furnace operation and service requirements.</p> <p>17 Control center.</p> <p>18 Blower access panel safety interlock switch.</p> <p>19 Transformer (24v) behind control center provides low-voltage power to furnace control center and thermostat.</p> |
|--|---|

Physical data

UNIT SIZE	040-08	040-12	060-08	060-12	060-16	080-12	080-16	080-20	100-16	100-20	120-20
OUTPUT CAPACITY BTUH* (Nonweatherized ICS)	37,000	37,000	55,000	55,000	55,000	74,000	74,000	74,000	92,000	92,000	111,000
INPUT BTUH†	40,000	40,000	60,000	60,000	60,000	80,000	80,000	80,000	100,000	100,000	120,000
SHIPPING WEIGHT (Lb)	164	168	171	174	174	190	196	204	220	221	245
CERTIFIED TEMP RISE RANGE (°F)	30 — 60	15 — 45	45 — 75	30 — 60	20 — 50	40 — 70	30 — 60	20 — 50	45 — 75	30 — 60	40 — 70
CERTIFIED EXT STATIC PRESSURE (In. wc)	Heating	0.10	0.10	0.12	0.12	0.12	0.15	0.15	0.15	0.20	0.20
	Cooling	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
AIRFLOW CFM‡	Heating	850	1125	885	1065	1320	1190	1285	1785	1315	1690
	Cooling	895	1215	900	1200	1545	1245	1525	1925	1570	2000
LIMIT CONTROL	SPST										
HEATING BLOWER CONTROL (Off Delay)	Selectable 90, 120, 150, or 180 sec										
BURNERS (Monoport)	2	2	3	3	3	4	4	4	5	5	6
GAS CONNECTION SIZE	1/2-in. NPT										
GAS VALVE Manufacturer	White-Rodgers										
Minimum Inlet Pressure (In. wc)	4.5 (Natural Gas)										
Maximum Inlet Pressure (In. wc)	13.6 (Natural Gas)										
IGNITION DEVICE	Hot Surface										

* Capacity in accordance with U.S. Government DOE test procedures.

† Gas input ratings are certified for elevations to 2000 ft. For elevations above 2000 ft, reduce ratings 2% for each 1000 ft above sea level. In Canada, derate the unit 10% for elevations 2000 to 4500 ft above sea level.

‡ Airflow shown is for bottom only return-air supply. For air delivery above 1800 CFM at 0.5" W.C. ESP, see Air Delivery Table for other options. A filter is required for each return-air supply.

ICS — Isolated Combustion System

Thermostat and zoning control options

NON-PROGRAMMABLE THERMOSTAT SELECTION	
TSTATCCNAC01-B	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover
TSTATCCNHP01-B*	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover
TSTATCCN2S01-B*	For use with 2-spd. Air Conditioner - deg. F/C, Auto Changeover
TSTATCCBAC01-B	For use with 1-spd. Air Conditioner - deg. F/C
TSTATCCPRH01-B**	For multi-use / stage configurations - deg. F/C, Auto Changeover/Temperature and Humidity Control

* Model HP and 2S thermostat must be field converted to air conditioner operation.

**Thermidistat Control is versatile and can be configured for multiple use and staging, it must be configured for each specific application.

PROGRAMMABLE THERMOSTAT SELECTION	
TSTATCCPAC01-B	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCPHP01-B*	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCP2S01-B*	For use with 2-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCSAC01	For use with 1-spd. Air Conditioner - deg. F/C, 5-2 Day Programmable
TSTATCCPDF01-B**	For use with multi-stage applications - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCPRH01-B***	For multi-use / stage configurations - deg. F/C, Auto Changeover, 7-Day Programmable/Temperature and Humidity Control


* Model HP and 2S thermostat must be field converted to air conditioner operation.

**Dual Fuel thermostat is used with furnace and heat pump application

***Thermidistat Control can be configured for multiple use and staging, it must be configured for each specific application.

ZONING CONTROL SELECTION	
ZONEKIT2ZCAR	WeatherMaker Two-Zone kit
ZONECC2KIT01-B	Comfort Zone II-B 2-Zone kit/Temperature and Humidity Control
ZONECC4KIT01-B	Comfort Zone II-B 4-Zone kit/Temperature and Humidity Control
ZONECC8KIT01-B	Comfort Zone II-B 8-Zone kit/Temperature and Humidity Control

CONDENSATE TRAP

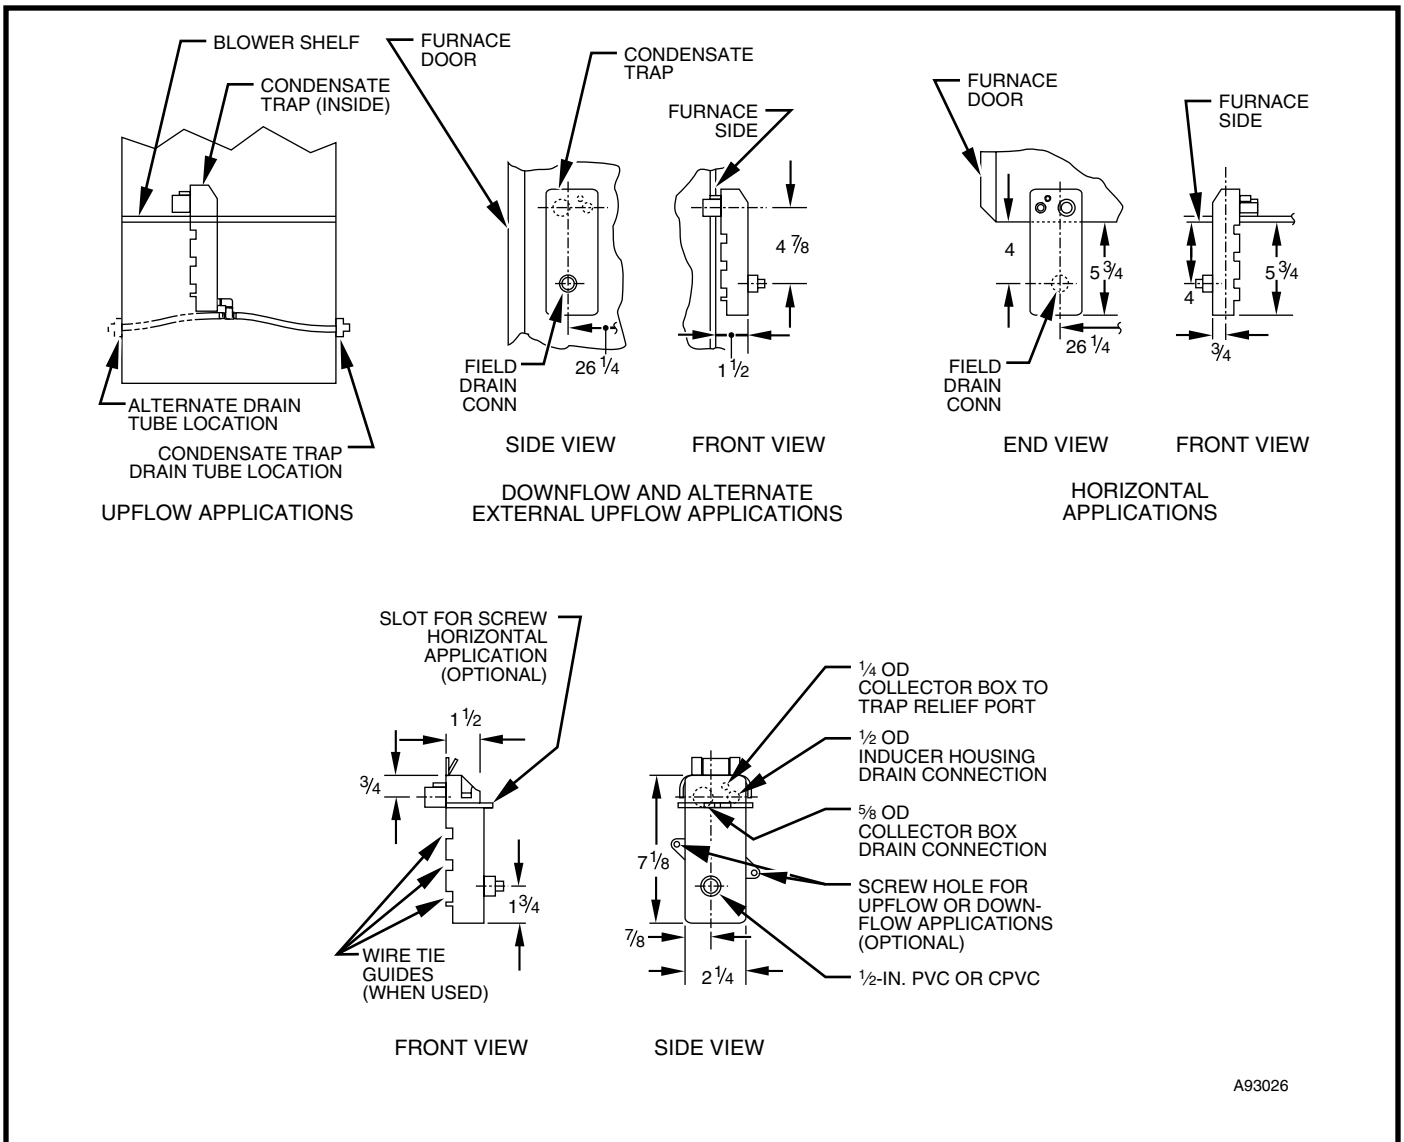

A93026



MEETS DOE RESIDENTIAL CONSERVATION SERVICES PROGRAM STANDARDS.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer.



As an ENERGY STAR Partner, Carrier Corporation has determined that this product meets the ENERGY STAR guidelines for energy efficiency.



REGISTERED QUALITY SYSTEM
These products are engineered and manufactured under an ISO 9001 registered quality system.

Performance data

UNIT SIZE	040-08	040-12	060-08	060-12	060-16	080-12	080-16	080-20	100-16	100-20	120-20
DIRECT-DRIVE MOTOR Hp (PSC)	1/5	1/3	1/5	1/3	1/2	1/3	1/2	3/4	1/2	3/4	3/4
MOTOR FULL LOAD AMPS	4.9	5.8	4.9	5.8	7.9	5.8	7.9	11.1	7.9	11.1	11.1
RPM (Nominal) — SPEEDS	1075 — 3	1075 — 4	1075 — 3	1075 — 4							
BLOWER WHEEL DIAMETER X WIDTH (In.)	10 x 6	10 x 7	10 x 6	10 x 7	11 x 8	10 x 7	11 x 8	11 x 10	11 x 8	11 x 10	11 x 10
FILTER SIZE (In.) — (Washable)	(1) 16 x 25 x 1							(1) 20 x 25 x 1			(1) 24x25x1

PSC — Permanent Split Capacitor

EFFICIENCY

UNIT SIZE	040-08	040-12	060-08	060-12	060-16	080-12	080-16	080-20	100-16	100-20	120-20
CAPACITY* Nonweatherized ICS	37,000	37,000	55,000	55,000	55,000	74,000	74,000	74,000	92,000	92,000	111,000
AFUE%* Nonweatherized ICS	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0

* Capacity and AFUE in accordance with U.S. Government DOE test procedures.

ICS — Isolated Combustion System

AIR DELIVERY — CFM (With Filter)*

UNIT SIZE	RETURN-AIR SUPPLY	SPEED	EXTERNAL STATIC PRESSURE (In. wc)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
040-08	1 side or bottom	High	1075	1040	995	945	895	840	760	670
		Med-Low	850	825	780	740	685	635	560	480
		Low	740	700	650	620	565	515	455	385
040-12	1 side or bottom	High	1470	1415	1400	1285	1215	1120	995	890
		Med-High	1315	1280	1235	1180	1115	1035	930	825
		Med-Low	1125	1110	1085	1045	990	915	830	740
060-08	1 side or bottom	High	1100	1065	1005	945	900	805	730	610
		Med-Low	890	865	810	765	705	620	540	475
		Low	745	710	670	625	565	505	425	360
060-12	1 side or bottom	High	1430	1375	1325	1275	1200	1135	1040	935
		Med-High	1270	1260	1215	1160	1105	1035	950	850
		Med-Low	1070	1055	1045	1015	975	920	850	750
060-16	1 side or bottom	High	1700	1695	1640	1580	1545	1450	1380	1310
		Med-High	1500	1465	1435	1385	1355	1300	1250	1185
		Med-Low	1325	1295	1265	1230	1190	1150	1105	1050
080-12	1 side or bottom	High	1535	1470	1405	1330	1245	1160	1065	935
		Med-High	1395	1350	1300	1125	1155	1080	985	880
		Med-Low	1200	1175	1125	1065	1030	970	890	780
080-16	1 side or bottom	High	1750	1685	1635	1575	1525	1445	1380	1310
		Med-High	1495	1455	1405	1355	1305	1250	1185	1120
		Med-Low	1310	1260	1225	1170	1125	1095	1040	980
080-20	1 side or bottom	High	2200	2175	2085	2025	1925	1820	1735	1635
		Med-High	2100	2025	1945	1865	1785	1700	1620	1540
		Med-Low	1815	1760	1720	1670	1620	1550	1480	1405
080-20	both sides or 1 side and bottom	Low	1560	1555	1515	1460	1435	1390	1340	1270
		High	2360	2280	2210	2130	2035	1960	1875	1790
		Med-High	1965	1925	1870	1830	1760	1710	1670	1575
100-16	1 side or bottom	High	1740	1705	1660	1615	1570	1500	1425	1355
		Med-High	1500	1470	1445	1410	1375	1330	1280	1210
		Med-Low	1340	1315	1300	1270	1235	1200	1140	1095
100-20	1 side or bottom	Low	1195	1175	1165	1130	1100	1070	1030	975
		High	2250	2175	2090	2020	1930	1855	1760	1670
		Med-High	2020	1950	1900	1840	1790	1710	1640	1545
100-20	both sides or 1 side and bottom	Med-Low	1725	1690	1660	1630	1575	1520	1460	1370
		Low	1490	1480	1460	1440	1380	1340	1295	1230
		High	2360	2315	2265	2200	2130	2055	1965	1890
120-20	bottom only	Med-High	1960	1940	1930	1900	1850	1800	1740	1660
		High	2350	2250	2160	2070	2000	1885	1790	1635
		Med-High	2100	2015	1955	1875	1810	1710	1650	1540
120-20	both sides or 1 side and bottom	Med-Low	1770	1720	1675	1620	1575	1515	1450	1365
		Low	1545	1520	1465	1415	1365	1325	1265	1185
		High	2435	2360	2285	2220	2130	2050	1965	1875
120-20	1 side only	Med-High	2040	2000	1950	1905	1835	1790	1725	1650
		High	2255	2190	2115	2045	1965	1890	1800	1710
		Med-High	1985	1930	1890	1840	1780	1720	1645	1560

8 *A filter is required for each return-air supply.
 • For horizontal and downflow applications, use "1 side or bottom" or "bottom only" as airflow reference.

Electrical data

UNIT SIZE	040-08	040-12	060-08	060-12	060-16	080-12	080-16	080-20	100-16	100-20	120-20
UNIT VOLTS — HERTZ — PHASE	115 — 60—1										
OPERATING VOLTAGE RANGE (Min — Max)*	104 — 127										
MAXIMUM UNIT AMPS	6.1	7.3	6.1	7.1	9.5	7.6	10.0	14.1	10.2	14.8	14.6
UNIT AMPACITY†	8.4	10.0	8.4	9.8	12.8	10.4	13.4	18.4	13.5	19.3	19.1
MINIMUM WIRE SIZE	14	14	14	14	14	14	14	12	14	12	12
MAXIMUM WIRE LENGTH (Ft)‡	44	37	44	38	29	36	28	31	27	30	30
MAXIMUM FUSE SIZE OR CKT BKR (Amps)**	15	15	15	15	15	15	15	20	15	20	20
TRANSFORMER (24v)	40va										
EXTERNAL CONTROL POWER AVAILABLE	Heating										
	Cooling										
AIR CONDITIONING BLOWER RELAY	Standard										


* Permissible limits of the voltage range at which the unit will operate satisfactorily.

† Unit ampacity = 125% of largest operating component's full load amps plus 100% of all other potential operating components' (EAC, humidifier, etc.) full load amps.

‡ Length is as measured 1 way along wire path between unit and service panel for maximum 2% voltage drop.

** Time-delay type is recommended.

Typical wiring schematic

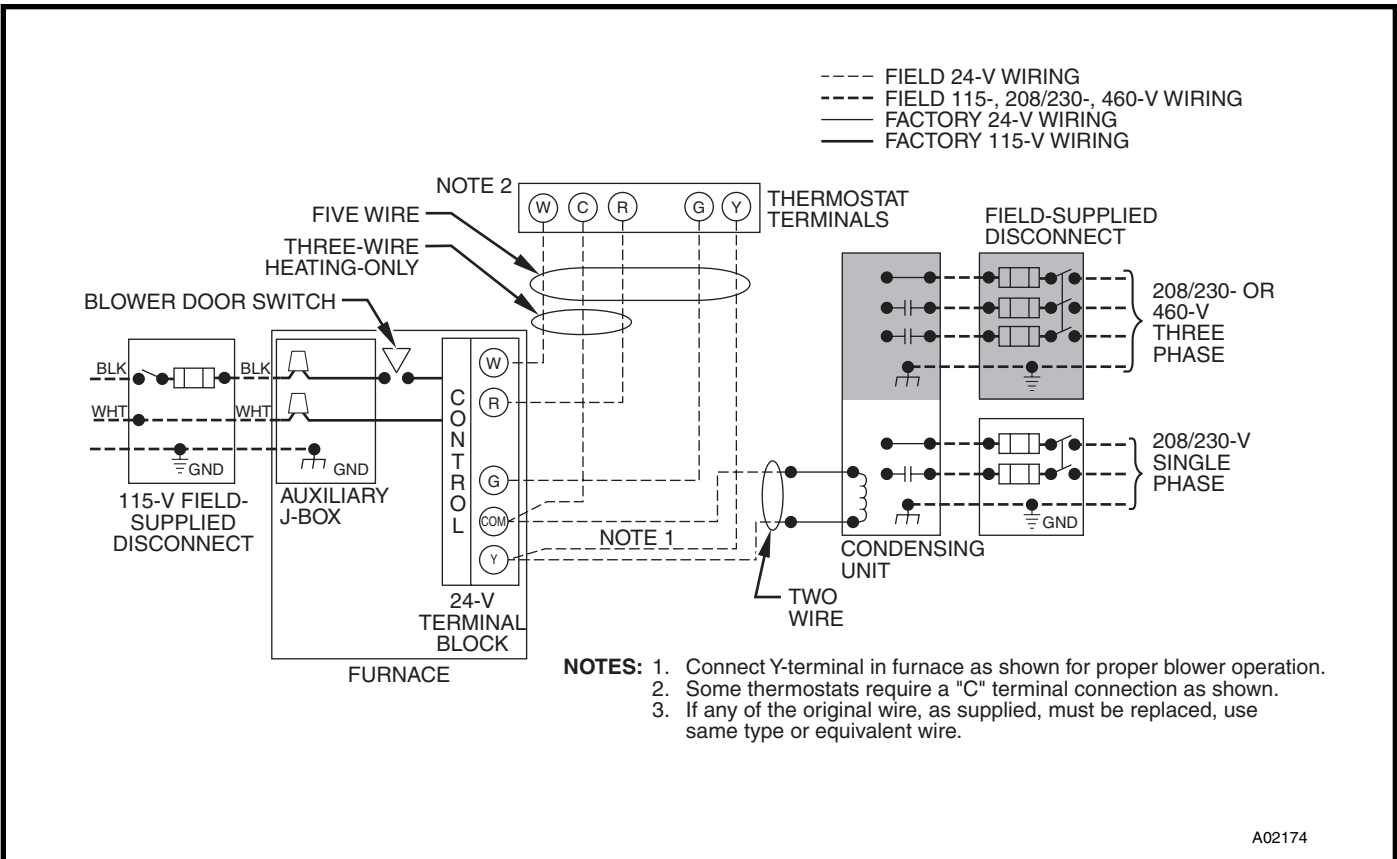

A02174

Vent piping

MAXIMUM ALLOWABLE VENT PIPE (1 PIPE SYSTEM) LENGTH (FT)

ALTITUDE ABOVE SEA LEVEL (FT)	UNIT SIZE	VENT PIPE DIA (IN.)	NUMBER OF 90° ELBOWS						
			1	2	3	4	5	6	
0 to 2000	040-08 040-12	1	5	NA	NA	NA	NA	NA	NA
		1-1/2	70	70	65	60	60	55	
		2	70	70	70	70	70	70	
	060-08 060-12 060-16	1-1/2	20	15	10	5	NA	NA	
		2	70	70	70	70	70	70	
		1-1/2	10	NA	NA	NA	NA	NA	
	080-12 080-16 080-20	2	55	50	35	30	30	20	
		2-1/2	70	70	70	70	70	70	
		2	5	NA	NA	NA	NA	NA	
	100-16 100-20	2-1/2	40	30	20	20	10	NA	
		3	70	70	70	70	70	70	
		2-1/2	10	NA	NA	NA	NA	NA	
120-20	2-1/2	10	NA	NA	NA	NA	NA		
	3*	70	70	70	70	70	70		
2001 to 3000	040-08 040-12	1-1/2	67	62	57	52	52	47	
		2	70	70	70	70	70	70	
	060-08 060-12 060-16	1-1/2	17	12	7	NA	NA	NA	
		2	70	67	66	61	61	61	
	080-12 080-16 080-20	2	49	44	30	25	25	15	
		2-1/2	70	70	70	70	70	70	
	100-16 100-20	2-1/2	35	26	16	16	6	NA	
		3	70	70	70	70	66	61	
	120-20	3*	63	62	62	61	61	61	
		3*	63	62	62	61	61	61	
	3001 to 4000	040-08 040-12	1-1/2	64	59	54	49	48	43
			2	70	70	70	70	70	70
060-08 060-12 060-16		1-1/2	16	11	6	NA	NA	NA	
		2	68	63	62	57	57	56	
080-12 080-16 080-20		2	46	41	28	23	22	13	
		2-1/2	70	70	70	70	70	70	
100-16 100-20		2-1/2	33	24	15	14	5	NA	
		3	70	70	70	66	61	56	
120-20		3*	59	59	58	57	57	56	
		3*	59	59	58	57	57	56	
4001 to 5000†		040-08 040-12	1-1/2	60	55	50	45	44	39
			2	70	70	70	70	70	70
	060-08 060-12 060-16	1-1/2	15	10	5	NA	NA	NA	
		2	64	59	58	53	52	52	
	080-12 080-16 080-20	2	44	39	26	21	20	11	
		2-1/2	70	70	70	70	70	70	
	100-16 100-20	2-1/2	31	22	13	12	NA	NA	
		3	70	70	67	62	57	52	
	120-20	3*	56	55	54	53	52	52	
		4† no disk	70	70	70	70	70	70	
	5001 to 6000†	040-08 040-12	1-1/2	57	52	47	42	40	35
			2	70	70	70	70	70	70
060-08 060-12 060-16		1-1/2	14	9	NA	NA	NA	NA	
		2	60	55	54	49	48	47	
080-12 080-16 080-20		2	41	36	23	18	17	8	
		2-1/2	70	70	70	70	70	70	
100-16 100-20		2-1/2	29	21	12	11	NA	NA	
		3	70	67	62	57	52	47	
120-20		3*	53	52	50	49	48	47	
		4† no disk	70	70	70	70	70	70	
6001 to 7000†		040-08 040-12	1-1/2	53	48	43	38	37	32
			2	70	70	68	67	66	64
	060-08 060-12 060-16	1-1/2	13	8	NA	NA	NA	NA	
		2	57	52	50	45	44	43	
	080-12 080-16 080-20	2	38	33	21	16	15	6	
		2-1/2	70	70	68	67	66	64	
	100-16 100-20	2-1/2	27	19	10	9	NA	NA	
		3	68	63	58	53	48	43	
	120-20	3*	49	48	47	45	44	43	
		4† no disk	70	70	70	70	67	62	

See notes on pg. 11.

MAXIMUM ALLOWABLE VENT PIPE (1 PIPE SYSTEM) LENGTH (FT) Continued

ALTITUDE ABOVE SEA LEVEL (FT)	UNIT SIZE	VENT PIPE DIA (IN.)	NUMBER OF 90° ELBOWS					
			1	2	3	4	5	6
7001 to 8000†	040-08 040-12	1-1/2	49	44	39	34	33	28
		2	66	65	63	62	60	59
	060-08 060-12 060-16	1-1/2	12	7	NA	NA	NA	NA
		2	53	48	46	41	40	38
	080-12 080-16 080-20	2	36	31	19	14	12	NA
		2-1/2	66	65	63	62	60	59
	100-16 100-20	2-1/2	25	17	8	7	NA	NA
		3	63	58	53	48	43	38
	120-20	3*	46	44	43	41	40	38
		4† no disk	61	56	51	46	41	36
8001 to 9000†	040-08 040-12	1-1/2	46	41	36	31	29	24
		2	62	60	58	56	55	53
	060-08 060-12 060-16	1-1/2	11	6	NA	NA	NA	NA
		2	49	44	42	37	35	34
	080-12 080-16 080-20	2	33	28	17	12	10	NA
		2-1/2	62	60	58	56	55	53
	100-16 100-20	2-1/2	23	15	7	5	NA	NA
		3	59	54	49	44	39	34
	120-20	3*	43	41	39	37	35	34
		4† no disk	35	30	25	20	15	10
9001 to 10,000†	040-08 040-12	1-1/2	42	37	32	27	25	20
		2	57	55	53	51	49	47
	060-08 060-12 060-16	2	45	40	38	33	31	29
		2	30	25	14	9	7	NA
	080-12 080-16 080-20	2-1/2	57	55	53	51	49	47
		2-1/2	21	13	5	NA	NA	NA
	100-16 100-20	3	54	49	44	39	34	29
		3*	39	37	35	33	31	29
	120-20	4† no disk	10	5	NA	NA	NA	NA

* Wide radius elbow.

† Vent sizing for Canadian installations above 4500 ft (1370m) above sea level are subject to acceptance by the local authorities having jurisdiction.
NA — Not allowed; pressure switch will not make.

NOTES:

1. Do not use pipe size greater than those specified in table or incomplete combustion, flame disturbance, or flame sense lockout may occur.
2. Assume two 45° elbows equal one 90° elbow. Long radius elbows are desirable and may be required in some cases.
3. Elbows and pipe sections within the furnace casing and at the vent termination should not be included in vent length or elbow count.
4. The minimum pipe length is 5 ft for all applications.

**MAXIMUM ALLOWABLE EXPOSED VENT PIPE LENGTH (FT) WITH INSULATION
IN WINTER DESIGN TEMPERATURE AMBIENT***

UNIT SIZE	WINTER DESIGN TEMP °F	MAXIMUM PIPE DIA	INSULATION THICKNESS (IN.)†				
			0	3/8	1/2	3/4	1
040-08 040-12	20	1-1/2	31	56	63	70	70
	0	1-1/2	16	34	39	47	54
	-20	1-1/2	9	23	27	34	39
060-08 060-12 060-16	20	2	45	70	70	70	70
	0	2	25	51	58	70	70
	-20	2	16	36	42	51	60
080-12 080-16 080-20	20	2-1/2	55	70	70	70	70
	0	2-1/2	31	61	69	70	70
	-20	2-1/2	20	43	49	61	70
100-16 100-20	20	3	61	70	70	70	70
	0	3	33	65	70	70	70
	-20	3	20	45	52	65	70
120-20	20	3	70	70	70	70	70
	0	3	40	70	70	70	70
	-20	3	26	55	64	70	70

* Pipe length (ft) specified for maximum vent pipe lengths located in unconditioned spaces. Vent pipes located in unconditioned space cannot exceed the total allowable pipe length as specified in Maximum Allowable Pipe Length table.

† Insulation thickness based on R value of 3.5 per in.

Clearance to combustibles

INSTALLATION

This forced air furnace is equipped for use with natural gas at altitudes 0 - 10,000 ft (0 - 3,050m), except 140 size Furnaces are only approved for altitudes 0 - 7,000 ft. (0 - 2,135m). An accessory kit, supplied by the manufacturer, shall be used to convert to propane gas use or may be required for some natural gas applications. This furnace is for indoor installation in a building constructed on site. This furnace may be installed in a manufactured (mobile) home when stated on rating plate and using factory authorized kit.

This furnace may be installed on combustible flooring in alcove or closet at minimum clearance from combustible material. This appliance requires a special venting system. Refer to the installation instructions for parts list and method of installation. This furnace is for use with schedule-40 PVC, PVC-DWV, CPVC, or ABS-DWV pipe, and must not be vented in common with other gas-fired appliances. Construction through which vent/air intake pipes may be installed is maximum 24 inches (600 mm), minimum 3/4 inches (19 mm) thickness (including roofing materials).


Cette fournaise à air pulsé est équipée pour utilisation avec gaz naturel et altitudes comprises entre 0 - 3,050m (0-10,000 pi), excepté queles fournaises de 140 taille sont pour altitudes comprises entre 0 - 2,135m (0 - 7,000 pi).

Utiliser une trousse de conversion, fournie par le fabricant, pour passer au gaz propane ou pour certaines installations au gaz naturel. Cette fournaise à air pulsé est pour installation à l'intérieur dans un bâtiment construit sur place. Cette fournaise à air pulsé peut être installée dans une maison préfabriquée (maison mobile) si prescrit par la plaque signalétique et si l'on utilise une trousse spécifiée par le fabricant.

Cette fournaise peut être installée sur un plancher combustible dans un enfoncement ou un placard en observant les dégagements minimums avec les matériaux combustibles. Cet appareil nécessite un système d'évacuation spécial. La méthode d'installation et la liste des pièces nécessaires figurent dans les instructions d'installation. Cette fournaise doit s'utiliser avec la tuyauterie des nomenclatures 40 PVC, PVC-DWV, CPVC, ou ABS-DWV et elle ne peut pas être ventilée conjointement avec d'autres appareils à gaz. Epaisseur de la construction au travers de laquelle il est possible de faire passer les tuyaux d'aération (admission/évacuation): 24 po (600 mm) maximum, 3/4 po (19 mm) minimum (y compris la toiture).

For upflow and downflow applications, furnace must be installed level, or pitched within 1/2" of level. For a horizontal application, the furnace must be pitched minimum 1/4" to maximum of 1/2" forward for proper drainage. See Installation Manual for IMPORTANT unit support details on horizontal applications.

Pour des applications de flux ascendant et descendant, la fournaise doit être installée de niveau ou inclinée à pas plus de 1/2" du niveau. Pour une application horizontale, la fournaise doit être inclinée entre minimum 1/4" et maximum 1/2" du niveau pour le drainage approprié. En cas d'installation en position horizontale, consulter les renseignements IMPORTANTS sur le support dans le manuel d'installation.

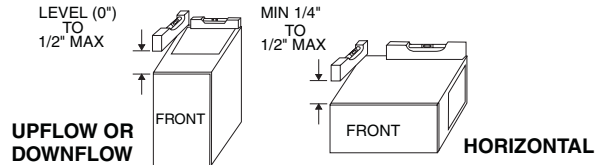

MINIMUM INCHES CLEARANCE TO COMBUSTIBLE CONSTRUCTION

ALL POSITIONS:

- * Minimum front clearance for service 30 inches (762mm).
- †† 140 size furnaces require 1 inch back clearance to combustible materials.

DOWNFLOW POSITIONS:

- † For installation on combustible floors only when installed on special base No. KGASB0201ALL, Coil Assembly, Part No. CD5 or CK5, or Coil Casing, Part No. KCAKAC.

HORIZONTAL POSITIONS:

- Line contact is permissible only between lines formed by intersections of top and two sides of furnace jacket, and building joists, studs, or framing.
- § Clearance shown is for air inlet and air outlet ends.
- Ø 120 and 140 size furnaces require 1 inch bottom clearance to combustible materials.

DÉGAGEMENT MINIMUM EN POUCES AVEC ÉLÉMENTS DE CONSTRUCTION COMBUSTIBLES

POUR TOUS LES POSITIONS:

- * Dégagement avant minimum de 762mm (30 po) pour l'entretien.
- †† Pour les fournaises de 140 taille, 1 po (25mm) dégagement des matériaux combustibles est requis au-arriere.

POUR LA POSITION COURANT DESCENDANT:

- † Pour l'installation sur le plancher combustible seulement quand on utilise la base spéciale, pièce n° KGASB0201ALL, l'ensemble serpentin, pièce n° CD5 ou CK5, ou le carter de serpentin, pièce n° KCAKAC.


POUR LA POSITION HORIZONTALE:

- Le contact n'est permis qu'entre les lignes formées par les intersections du dessus et des deux côtés de la chemise de la fournaise, et des solives, des montants ou de la charpente du bâtiment.
- § La distance indiquée concerne l'extrémité du tuyau d'arrivée d'air et l'extrémité du tuyau de sortie d'air.
- Ø Pour les fournaises de 120 et 140 taille, 1 po (25mm) dégagement des matériaux combustibles est requis au-dessous.

324999-201 REV. D (LIT TOP)



This furnace is approved for UPFLOW, DOWNFLOW and HORIZONTAL installations.



Cette fournaise est approuvée pour l'installation HORIZONTALE et la circulation d'air VERS LE HAUT et VERS LE BAS.

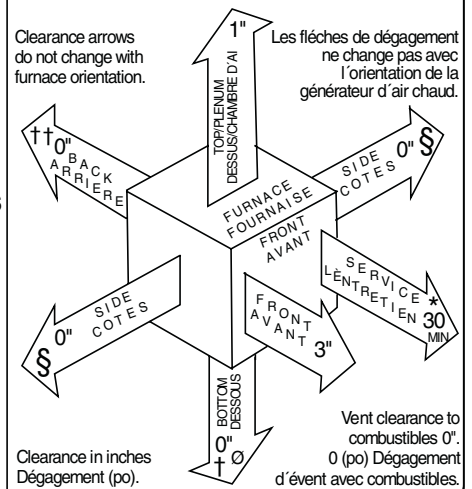

A02148

Typical installations

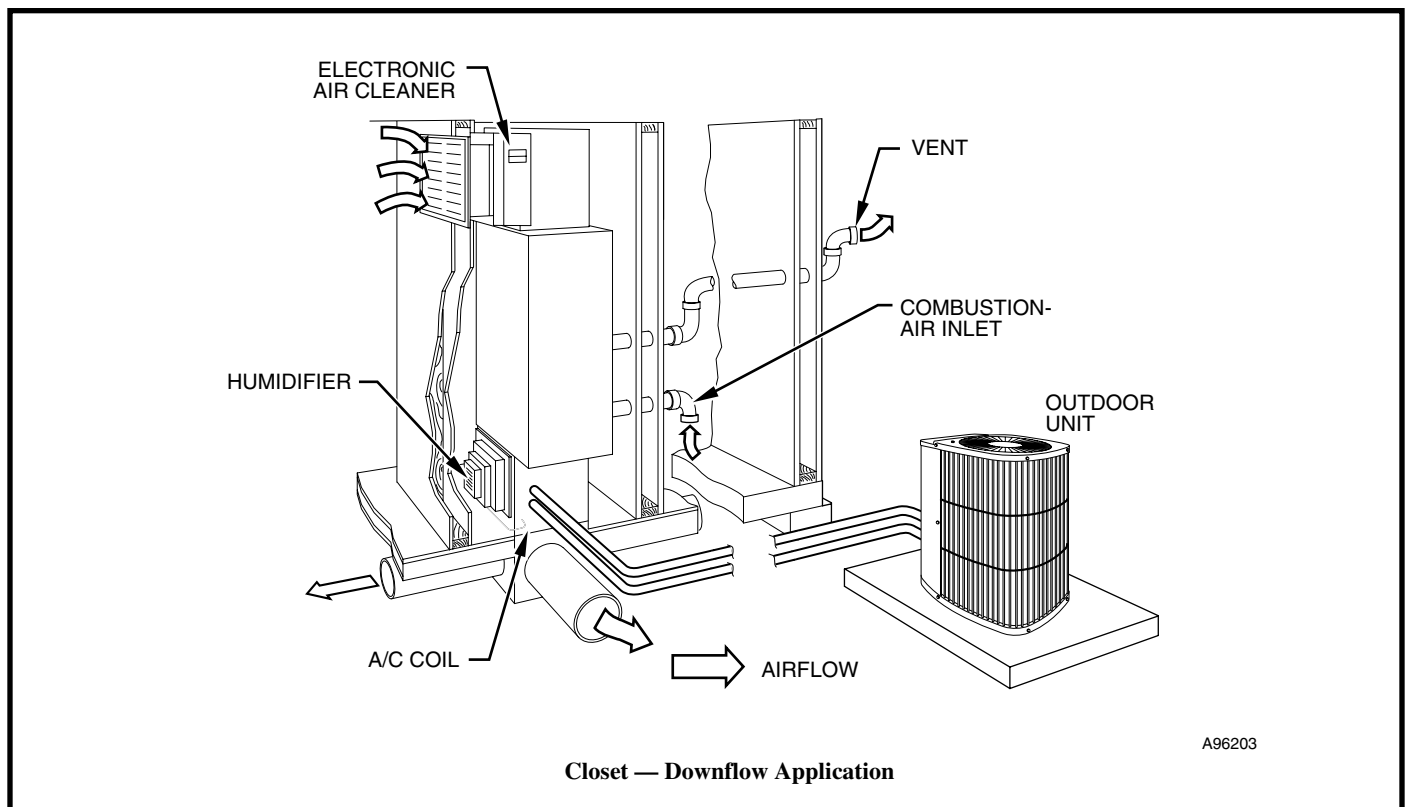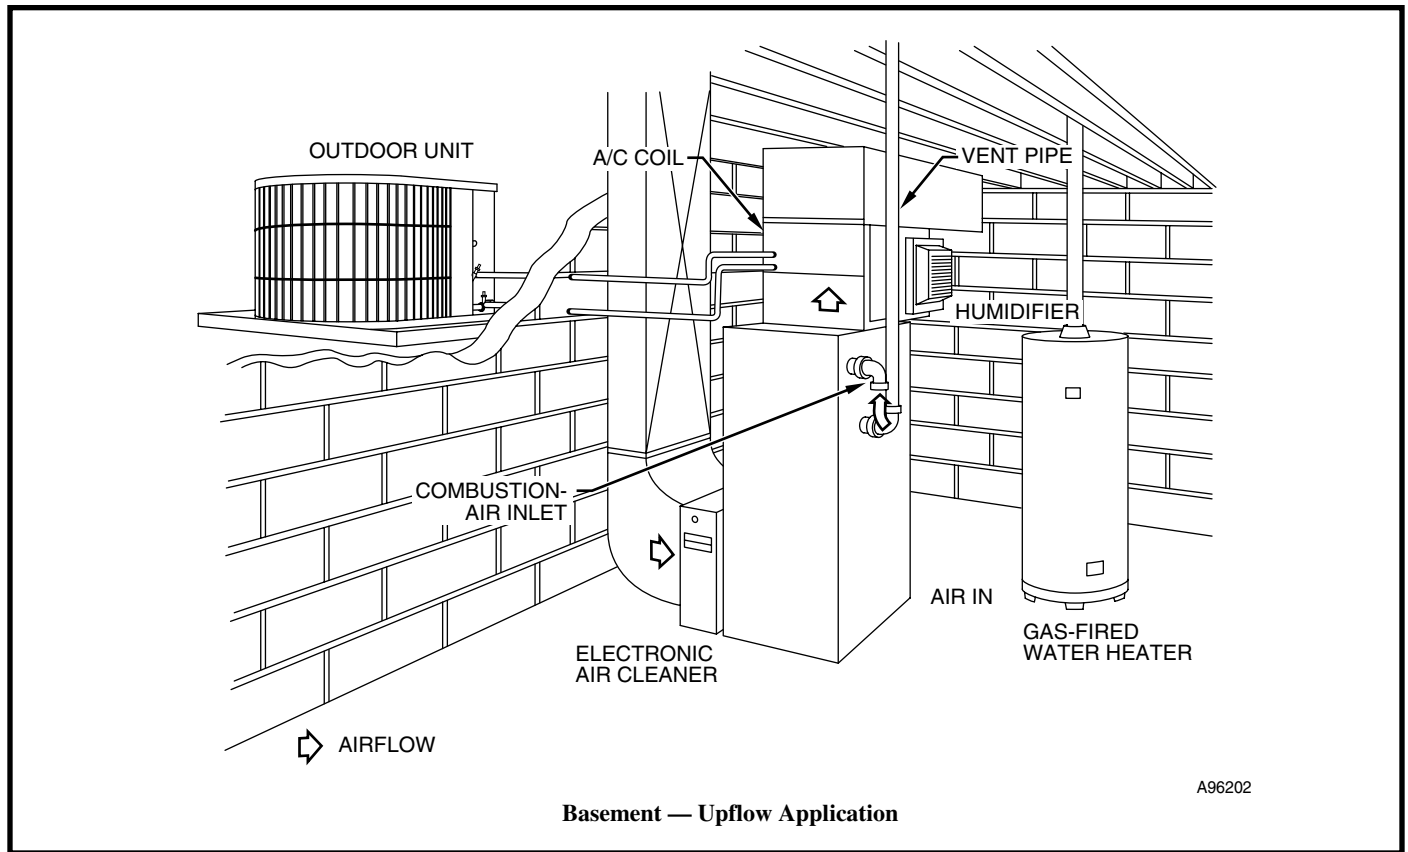

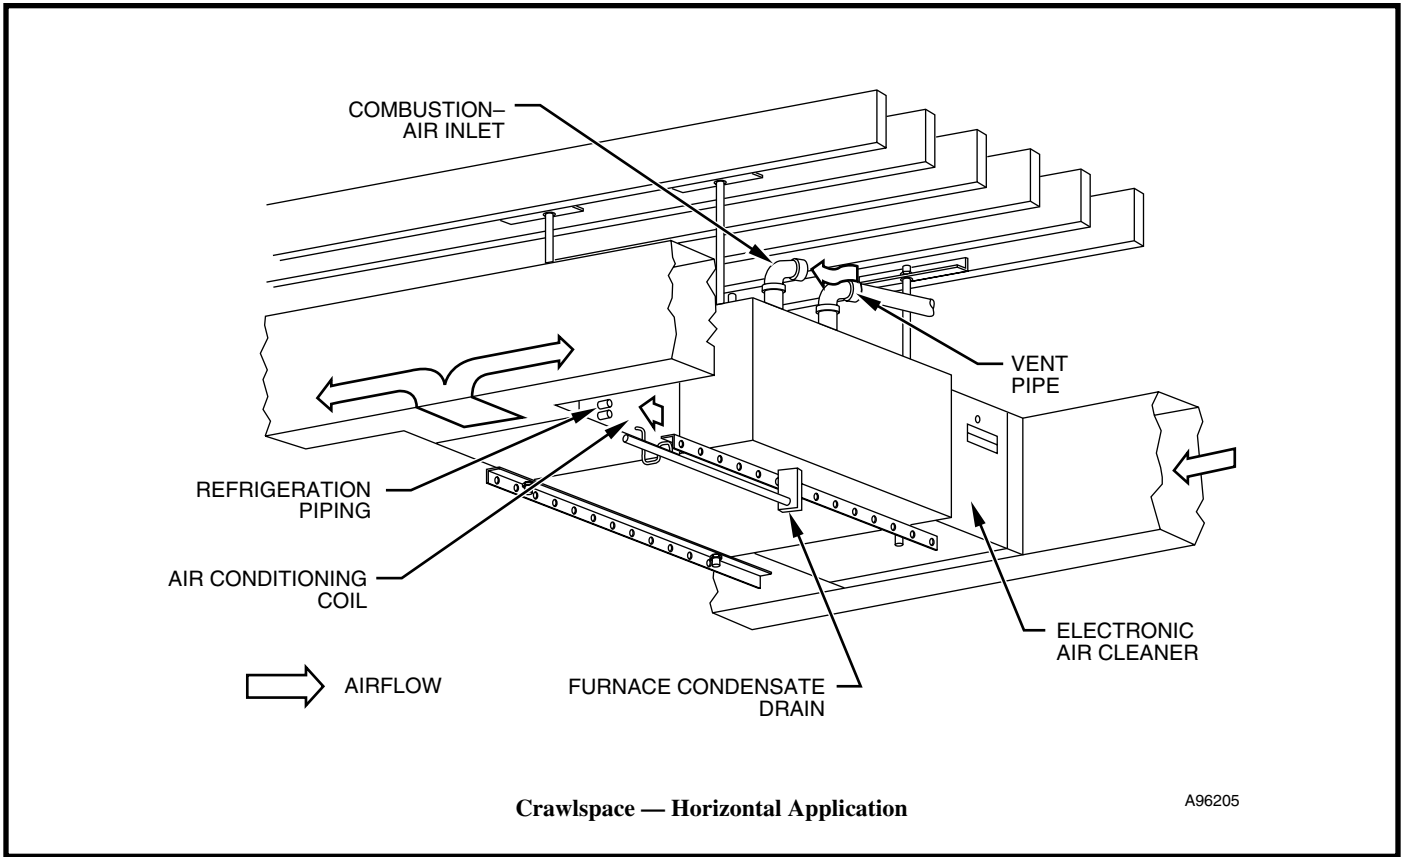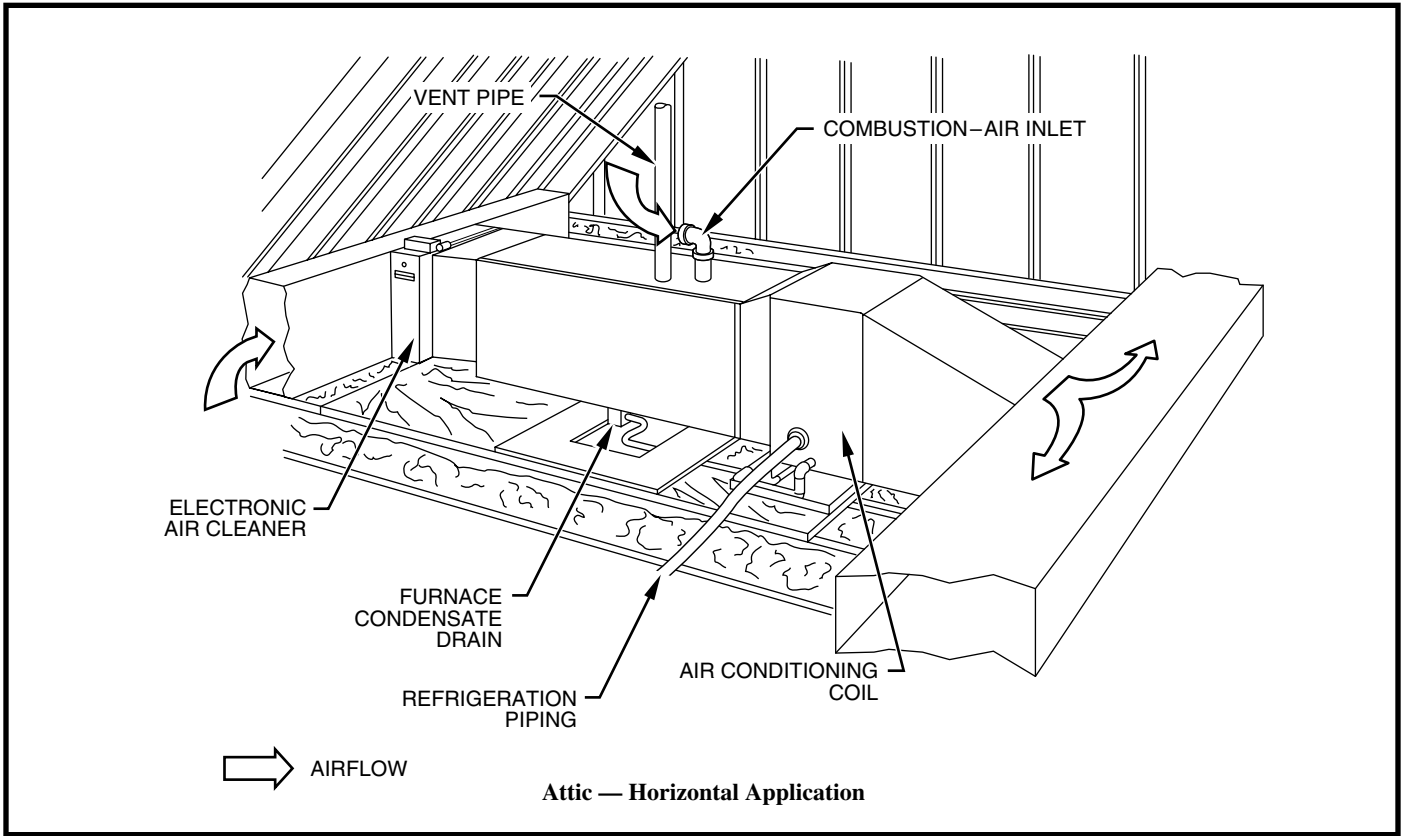



Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.